


REMOTE CONTROL RELAY FOR ELECTRIC CAR LOADS OVER 25 AMPS

CONTACTORS/RELAYS MUST
BE SIZED TO SUPPORT
LOAD BEING CONTROLLED

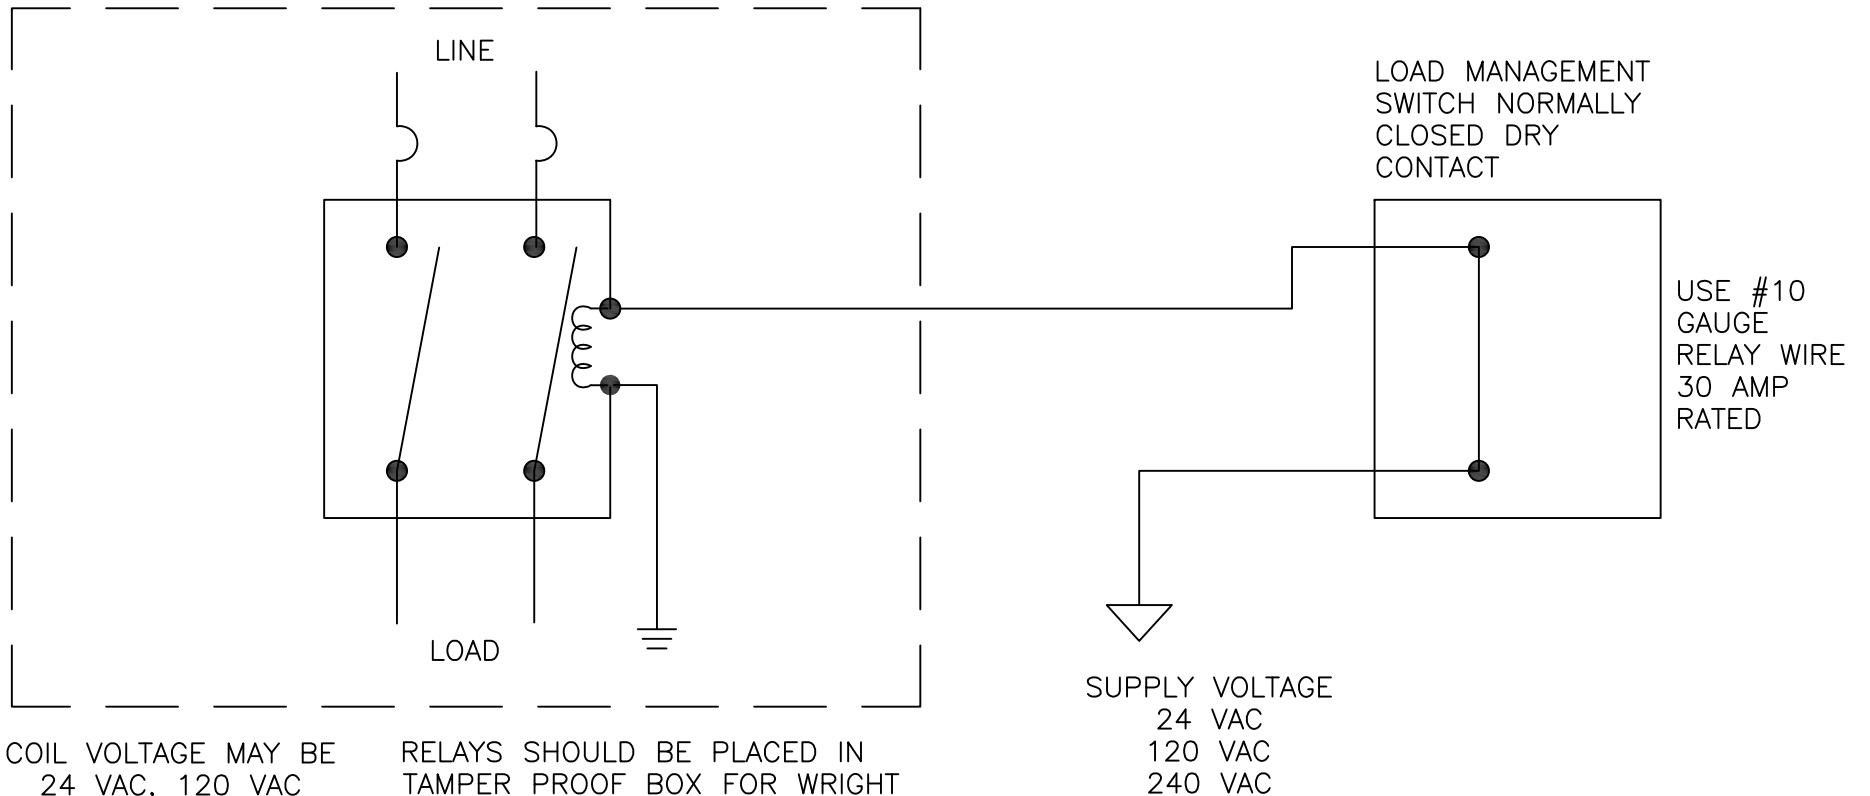

COIL VOLTAGE MAY BE
24 VAC, 120 VAC
OR 240 VOLTS

RELAYS SHOULD BE PLACED IN
TAMPER PROOF BOX FOR WRIGHT
HENNEPIN TO SEAL UP.

NOTES:

1. WRIGHT HENNEPIN COOPERATIVE ELECTRIC ASSOCIATION IS NOT RESPONSIBLE OR LIABLE FOR ANY PERSONAL INJURY OR PROPERTY DAMAGE IN THE WIRING OF OR THE OPERATION OF THE ENERGY SAVINGS PROGRAM.
2. LOAD CONTROL SWITCH AND METER SOCKET MUST BE MOUNTED OUTSIDE 4' TO 5' OFF THE GROUND.
3. FOR LYNDIS AND GYR SWITH USE #10 GAUGE ORANGE RELAY WIRE.
4. FOR EATON SWITCH USE #18 YELLOW RELAY WIRES.



WRIGHT HENNEPIN COOPERATIVE ELECTRIC ASSOCIATION
Energy and Services Department
1-800-943-2667

REMOTE CONTROL RELAY
FOR ELECTRIC CAR

LM16

12/21/18

BY: ERA